



CDT-1 (PET) DIRECT THERMAL SENSITIVITY RESULTS

DYNAMIC SENSITIVITY

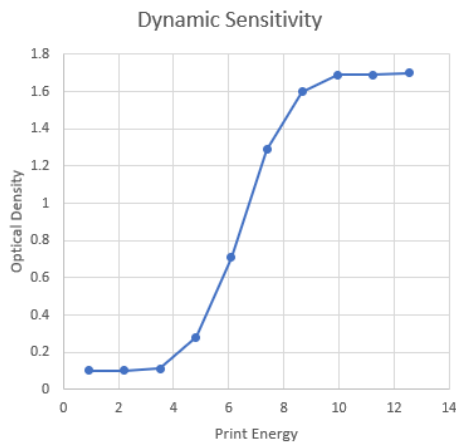

STATIC SENSITIVITY

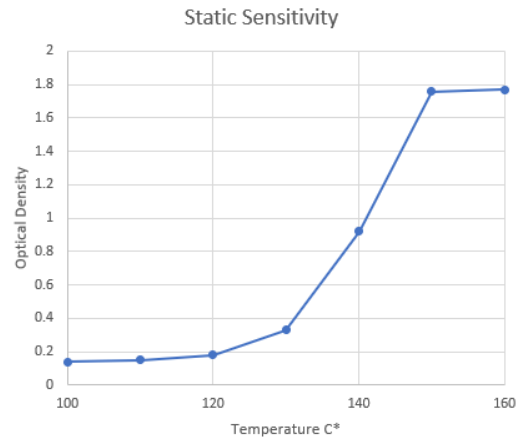

Sensitivity curves for reference only. Storage Conditions: Below 95°F (35°C) and less than 85% R.H. in a warehouse, avoiding direct sunlight. Dynamic sensitivity tests performed on Markpoint MP104.

LINER AND ADHESIVE PROPERTIES

Liner: 40 lbs (24 x 36 x 500)

Caliper: 2.1 mils ± 10% (61 ± 6µm)

Opacity: 65% Maximum (Photovolt)

G12 Adhesive: Wide Temperature and Permanent

LAMINATED PRODUCT PROPERTIES

Application Temperature	G12
°F	-40 to 122
°C	-40 to 50
Service Temperature	
°F	-65 to 131
°C	-54 to 55
Basis Weight (24 x 36 x 500)	
lbs	95 ± 9
g/sq m	155 ± 15
Caliper	
mil	5.3 ± 0.6
µm	134 ± 16

CONTACT US

1125 Hurricane Shoals Road,
Lawrenceville, GA 30043

www.REI.Ricoh.com

Email: Orders@rei.ricoh.com

Customer Service:

(800) 843-7059

Toll-Free Fax: (888) 873-7059