

N150LA-2 DIRECT THERMAL

Specifications may change without notice.
Last Update: June 2025 PS-1183 (Rev.10)



PRODUCT FEATURES

N150LA-2 is a premium, top-coated direct thermal label stock designed for high-speed printing with superior image resolution and barcode reliability. Ideal for weigh scale labels, meat processing, and product identification, it offers high sensitivity, excellent image preservation, and a G25 adhesive for wide-temperature performance and permanent adhesion.

APPLICATION AREAS

- Weigh Scale Labels
- Meat Processing
- Laboratory Labels
- Product ID

FACESTOCK PROPERTIES

Basis Weight

lbs (24 x 36 x 500 sheets)	43.6 ± 5
g/sq m	71 ± 8

Caliper

mil	3.0 ± 0.3
µm	76 ± 7

Image Density (ODU Minimum) 1.30

Tear Strength (gf Minimum)

MD	30
CD	35

Tensile Strength (kgf/15 mm Minimum)

MD	5.4
CD	2.7

Stiffness (g-cm Minimum)

MD	3.0
CD	2.5

Initial Activation Temperature (°F / °C)

O.D. = 0.2	248°F / 120°C
------------	---------------

Effective Activation Temperature (°F / °C)

O.D. = 0.8	266°F / 130°C
------------	---------------

CERTIFICATIONS

- Indirect Food Contact
- ISO9001
- ISO14001

REGULATORY



BPA Free



No Added PFAS

PRESERVATION PROPERTIES

Oil Resistance

Image	1.20 Minimum
Background	0.15 Maximum
Test Method	40°C, Dry, 15 Hrs, X-Rite (ODU)

Moisture Resistance

Image	1.20 Minimum
Background	0.15 Maximum
Test Method	40°C, 90% RH, 24 Hrs, X-Rite (ODU)

Heat Resistance


Image	1.20 Minimum
Background	0.20 Maximum
Test Method	100°C, Dry, 1 Hr, X-Rite (ODU)

Light Resistance


Image	1.20 Minimum
Background	0.15 Maximum
Test Method	5000 lx, 100 Hrs, X-Rite (ODU)

N150LA-2 DIRECT THERMAL SENSITIVITY RESULTS

DYNAMIC SENSITIVITY

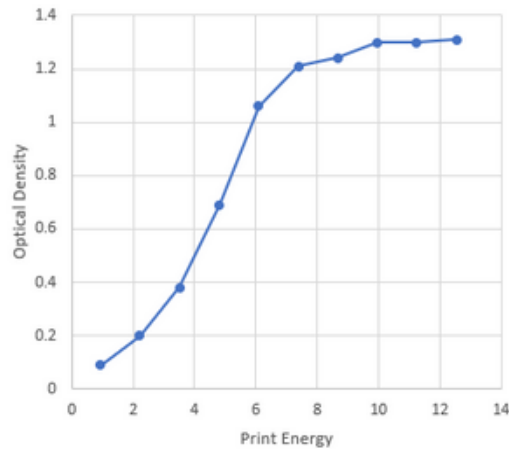

STATIC SENSITIVITY

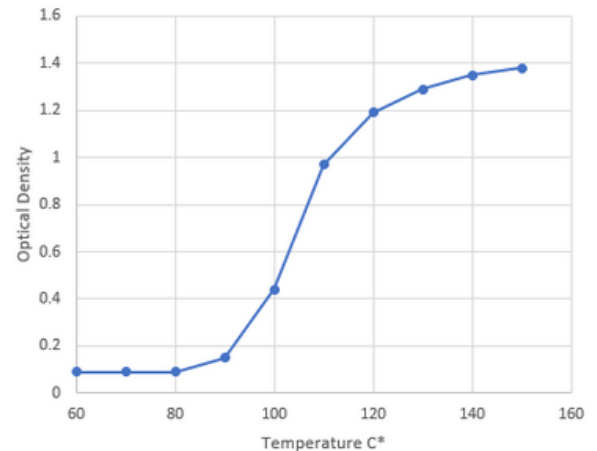

Sensitivity curves for reference only. Storage Conditions: Below 95°F (35°C) and less than 85% R.H. in a warehouse, avoiding direct sunlight. Dynamic sensitivity tests performed on Markpoint MP104.

LINER AND ADHESIVE PROPERTIES

Liner: 40 lbs (24 x 36 x 500)

Caliper: 2.4 mils ± 10% (61 ± 6µm)

Opacity: 65% Maximum (Photovolt)

G25 Adhesive: Wide Temperature and Permanent

LAMINATED PRODUCT PROPERTIES

Application Temperature

°F

G25

-40 to 122

°C

-40 to 50

Service Temperature

°F

-65 to 131

°C

-54 to 55

Basis Weight (24 x 36 x 500)

lbs

95 ± 12

g/sq m

154 ± 19

Caliper

mil

5.8 ± 0.7

µm

148 ± 19

CONTACT US

1125 Hurricane Shoals Road,
Lawrenceville, GA 30043

www.REI.Ricoh.com

Email: Orders@rei.ricoh.com

Customer Service:

(800) 843-7059

Toll-Free Fax: (888) 873-7059