RICOF imagine. change Dec 2022 PS-2376 (Rev. 3)

Specifications may change without notice Last update:

# CDT-1 (PET) **Clear Direct Thermal Film**

#### SHEET CATIO Ν

This product specification sheet provides the detail to aid you in identifying the most appropriate product type to meet your company's specific requirements. Please direct questions to: Ricoh Customer Service 1-800-843-7058

## DESCRIPTION

# **KEY FEATURES**

Ricoh's CDT-1 Clear direct thermal label stock is ideal for highspeed printing providing superior barcode reliability. A Clear Direct Thermal Label product enhances visibility of products while making the plastic substrate easier to recycle.

Clear Direct Thermal Product; High image resolution & barcode reliability; Strong water resistance & sensitivity, easier recycling process

#### C A Т Ν т т Δ RF S Ο Δ



Food Labeling

## PROPERTIES

SUBSTRATE	ITEM	UNIT	SPECIFICATION	TEST METHOD
Caliper		mil	2.1±0.24	JIS K-7130
Caliper		μm	54± 6	JIS K-7130
Haze		%	27 or less	JIS K-7136

### **IMAGE PROPERTIES**

	ITEM	UNIT	SPECIFICATION	TEST METHOD
Color of Image		-	Black	Visual Measurement
Image Density		-	1.50 Minimum	-

### PRESERVATION

ITEM	SPECIFICATION		TEST METHOD	
Plasticizer Resistance	Image	1.20 Minimum	23°C, Dry, 15 Hours	
Plasticizer Resistance	Background	0.20 Maximum	25 G, DIY, 15 Hours	
Oil Resistance	Image	1.20 Minimum	23°C, Dry, 24 Hours	
On Resistance	Background	0.20 Maximum		
	Image	1.20 Minimum		
Water Resistance	Background	0.20 Maximum	23°C, 15 Hours	
Temp/Humidity	Image	1.20 Minimum	40°C, 90% RH, 24 Hours	
Resistance	Background	0.20 Maximum	40 G, 50% KH, 24 Hours	
Heat Resistance	Image	1.20 Minimum	90°C Dry 1 Hour	
near Resistance	Background	0.20 Maximum	90°C, Dry, 1 Hour	
Light Desistance	Image	1.20 Minimum	Elucroscont Loren Ekky 100 Llour	
Light Resistance	Background	0.20 Maximum	Fluorescent Lamp 5klx, 100 Hours	
Microwave	Image	1.20 Minimum	1600W 60 cocord-	
Resistance	Background	0.20 Maximum	1600W, 60 seconds	


Ricoh Electronics, Inc. • 1125 Hurricane Shoals Road • Lawrenceville, GA 30043 • www.RicohThermalProducts.com Customer Service: 1.800.843.7058 • Toll Free FAX: 1.888.843.7059 • email: orders@rei.ricoh.com


# RICOF imagine. change. Dec 2022 PS-2376 (Rev. 3)

Specifications may change without notice Last update:

# CDT-1 (PET) **Clear Direct Thermal Label**

#### SENSITIVITY RESULTS

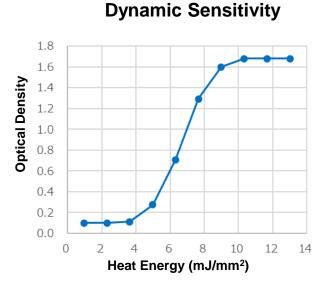

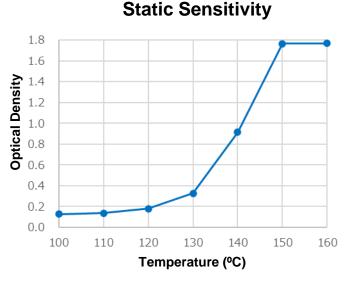

Sensitivity curves are for reference only.

Storage Conditions: Below 95°F (35° C) and less than 85% R.H. in a warehouse, avoiding direct sunlight. Tests performed on Markpoint MP104.

#### CDT-1 PET **ADHESIVE PROPERTY** \_

GRADE	UNIT	G12
Application	٥F	41 to 95
Temperature	٥C	5 to 35
Service	٥F	41 to 95
Temperature	٥C	5 to 35

## **CERTIFICATES / REGULATIONS / DIRECTIVES**

**BPA Free** REACH

RoHS ISO14001 ISO9001

RICOH ELECTRONICS, INC. DISCLAIMS ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE IN CONNECTION WITH THE CUSTOMER'S PURCHASE OF OUR PRODUCTS. IT IS CUSTOMER'S SOLE AND EXCLUSIVE RESPONSIBILITY TO TEST AND ENSURE SUITABILITY OF OUR PRODUCTS FOR ITS CUSTOMERS' OR END-USER'S APPLICATION.

### CONTACT ΙΝΕΟΚΜΑΤΙΟΝ

Copyright 2016 Ricoh Electronics. Inc. 1125 Hurricane Shoals Rd. Lawrenceville, GA 30043 All Rights Reserved

**Company Info** ISO14001 / ISO9001 Certified

**Customer Service Department** Toll-Free 1-800-843-7058 Toll-Free Fax 1-888-873-7059 Worldwide Fax +1-714-259-4349 Email: orders@rei.ricoh.com