

SPECIFICATION SHEET

This product specification sheet provides the detail to aid you in identifying the most appropriate product type to meet your company's specific requirements. Please direct questions to: **Ricoh Customer Service 1-800-843-7058**

DESCRIPTION

Ricoh's 130PLL-RRE Linerless direct thermal top coated label stock is ideal for high-speed printing providing superior barcode reliability. A silicone linerless product generates less waste and provide more labels per roll.

KEY FEATURES

Silicone Linerless label that provides an environmentally friendly solution; Medium Sensitivity, Excellent Barcode Scannability, Removable Adhesive

— APPLICATION AREAS —



Weigh Scale Labels



Postal & Shipping Labels

PROPERTIES

COATED PRODUCT PROPERTIES

ITEM	UNIT	SPECIFICATION	TEST METHOD
Basis Weight	g/m ²	93 ± 10	TAPPI T-410
Caliper	mil	3.5 ± 0.4	TAPPI T-411
	µm	88 ± 10	
Image Color		Black	Visual Check
Image Density	(ODU) Minimum	1.00	X-Rite Densitometer

PRESERVATION PROPERTIES


ITEM	SPECIFICATION	TEST METHOD
Oil Resistance	Image	0.70 Minimum
	Background	0.20 Maximum
Moisture Resistance	Image	0.70 Minimum
	Background	0.20 Maximum
Heat Resistance	Image	0.70 Minimum
	Background	0.20 Maximum
Light Lesistance	Image	0.70 Minimum
	Background	0.20 Maximum

ADHESIVE PROPERTIES


ITEM	UNIT	SPECIFICATION	TEST METHOD
Shear Resistance	mm	2.00 Maximum	1kg, 30min, 25mmx25mm, 22°C 55%
Release Value	mN/40mm	300 Maximum	300mm/min, 22°C 55%
Peel Adhesion	N/25mm	1.00 Minimum	SUS, 300mm/min, 22°C 55%

SENSITIVITY RESULTS

Dynamic Sensitivity

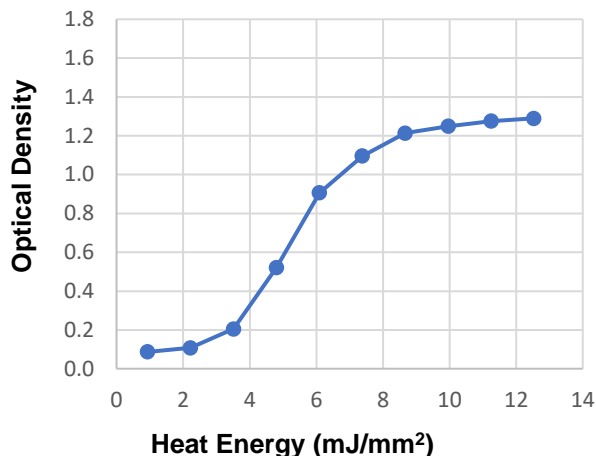

Static Sensitivity

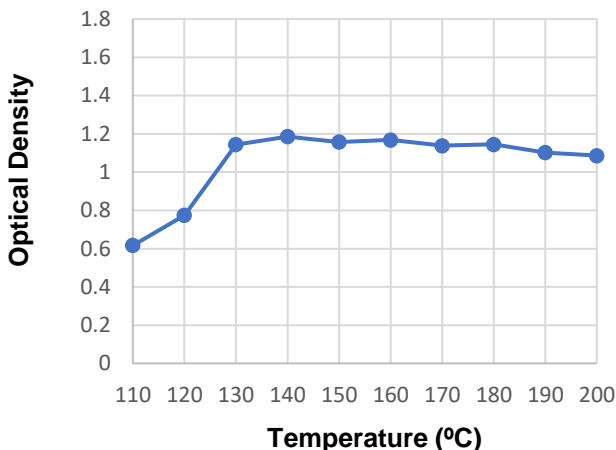

Sensitivity curves are for reference only.

Storage Conditions: Below 95°F (35° C) and less than 85% R.H. in a warehouse, avoiding direct sunlight.

Tests performed on Markpoint MP104.

130PLL-RRE – ADHESIVE PROPERTY

GRADE	UNIT	Hotmelt Removable Adhesive
Application Temperature	°F	41 to 95
	°C	5 to 35
Service Temperature	°F	41 to 95
	°C	5 to 35

CERTIFICATES / REGULATIONS / DIRECTIVES

BPA Free
REACH

RoHS
WEEE

ISO9001
ISO14001

RICOH ELECTRONICS, INC. DISCLAIMS ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE IN CONNECTION WITH THE CUSTOMER'S PURCHASE OF OUR PRODUCTS. IT IS CUSTOMER'S SOLE AND EXCLUSIVE RESPONSIBILITY TO TEST AND ENSURE SUITABILITY OF OUR PRODUCTS FOR ITS CUSTOMERS' OR END-USER'S APPLICATION.

CONTACT INFORMATION

Copyright 2016 Ricoh Electronics, Inc.
1125 Hurricane Shoals Rd.
Lawrenceville, GA 30043
All Rights Reserved

Company Info
ISO14001 / ISO9001 Certified

Customer Service Department
Toll-Free 1-800-843-7058
Toll-Free Fax 1-888-873-7059
Worldwide Fax +1-714-259-4349
Email: orders@rei.ricoh.com