



# SPECIFICATION SHEET

This product specification sheet provides the detail to aid you in identifying the most appropriate product type to meet your company's specific requirements.

Please direct questions to: **Ricoh Customer Service 1-800-843-7058**

## DESCRIPTION

150PRx PF is a medium-high sensitivity direct thermal stock with image durability that resists medical solutions.

## KEY FEATURES

Completely Phenol Free, Medium-high sensitivity; excellent resistant to medical solutions



# — APPLICATION AREAS —



Laboratory Labels



Product ID

# FACESTOCK / PRESERVATION PROPERTIES

## FACESTOCK PROPERTIES


ITEM		UNIT	SPECIFICATION	TEST METHOD
Basis Weight		lbs (24x36x500 sheets)	44.9 ± 4.5	TAPPI T-410
		g/m2	73 ± 7	
Caliper		mil	3.1 ± 0.3	TAPPI T-411
		µm	78.5 ± 8	
Image Color			Black	Visual Check
Image Density	(ODU)	Minimum	1.25	X-Rite Densitometer
Tear Strength	MD	gf Minimum	30.0	TAPPI T-414
	CD	gf Minimum	35.0	
Tensile Strength	MD	kgf/15 mm Minimum	5.4	TAPPI T-494
	CD	kgf/15 mm Minimum	2.7	
Stiffness	MD	g-cm Minimum	3.0	TAPPI T-489
	CD	g-cm Minimum	2.5	
Initial Activation Temperature	(O.D. = 0.2)	°F / °C	212 / 100	
Effective Activation Temperature	(O.D. = 0.8)	°F / °C	239 / 115	

## PRESERVATION PROPERTIES


ITEM	SPECIFICATION	TEST METHOD
Oil Resistance	Image	1.10 Minimum
	Background	0.15 Maximum
Moisture Resistance	Image	40° C, Dry, 15 Hours
	Background	X-Rite (ODU)
Heat Resistance	Image	1.10 Minimum
	Background	0.12 Maximum
Light Resistance	Image	80° C, Dry, 1 Hour
	Background	X-Rite (ODU)
Light Resistance	Image	1.10 Minimum
	Background	0.15 Maximum
		5,000 lx, 100 Hours
		X-Rite (ODU)

## SENSITIVITY RESULTS

### Dynamic Sensitivity

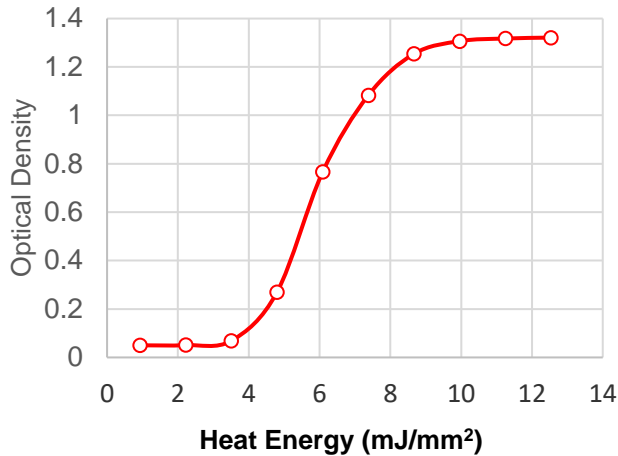

### Static Sensitivity

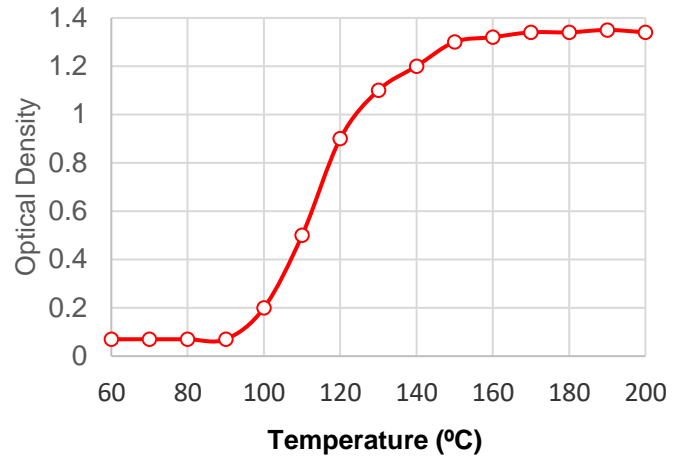

Sensitivity curves are for reference only.

Storage Conditions: Below 95°F (35° C) and less than 85% R.H. in a warehouse, avoiding direct sunlight.

Tests performed on Markpoint MP104.

## 150PRx PF – LAMINATED PRODUCT

GRADE	UNIT	G8
Application	°F	10 to 120
Temperature	°C	-12 to 49
Service	°F	-20 to 120
Temperature	°C	-29 to 49
Basis Weight	lbs	93 ± 12
(24 x 36 x 500)	g/m <sup>2</sup>	151 ± 19
Caliper	µm	150 ± 18
	mil	5.9 ± 0.7

Liner: 40 lbs

Caliper: 2.5 mils ± 10% (64 ± 8 µm)

Opacity: 65% Maximum (Photovolt)

**Adhesive Attributes:**

G8 – Tight Removable

## CERTIFICATES / REGULATIONS / DIRECTIVES

BPA Free

ISO9001

ISO14001

Indirect Food Contact

RICOH ELECTRONICS, INC. DISCLAIMS ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE IN CONNECTION WITH THE CUSTOMER'S PURCHASE OF OUR PRODUCTS. IT IS CUSTOMER'S SOLE AND EXCLUSIVE RESPONSIBILITY TO TEST AND ENSURE SUITABILITY OF OUR PRODUCTS FOR ITS CUSTOMERS' OR END-USER'S APPLICATION.

## CONTACT INFORMATION

**Copyright 2020 Ricoh Electronics, Inc.**

1125 Hurricane Shoals Rd.

Lawrenceville, GA 30043

All Rights Reserved

**Company Info**

ISO14001 / ISO9001 Certified

**Customer Service Department**

Toll-Free 1-800-843-7058

Toll-Free Fax 1-888-873-7059

Worldwide Fax +1-770-613-6478

Email: [orders@rei.ricoh.com](mailto:orders@rei.ricoh.com)