

SPECIFICATION SHEET

This product specification sheet provides the detail to aid you in identifying the most appropriate product type to meet your company's specific requirements. Please direct questions to: **Ricoh Customer Service 1-800-843-7058**

DESCRIPTION

Ricoh's 130PLL-RRE Linerless direct thermal top coated label stock is ideal for high-speed printing providing superior barcode reliability. A silicone linerless product generates less waste and provide more labels per roll.

KEY FEATURES

Silicone Linerless label that provides an environmentally friendly solution; Medium Sensitivity, Excellent Barcode Scannability, Removable Adhesive

— APPLICATION AREAS —



Weigh Scale Labels



Postal & Shipping Labels

PROPERTIES

COATED PRODUCT PROPERTIES

ITEM	UNIT	SPECIFICATION	TEST METHOD
Basis Weight	g/m2	90 ± 7	TAPPI T-410
Caliper	mil	3.5 ± 0.4	TAPPI T-411
	µm	88 ± 10	
Image Color		Black	Visual Check
Image Density	(ODU)	Minimum 1.00	X-Rite Densitometer

PRESERVATION PROPERTIES


ITEM	SPECIFICATION	TEST METHOD
Oil Resistance	Image 0.70 Minimum	80°C, Dry, 24 Hours X-Rite (ODU)
	Background 0.20 Maximum	
Moisture Resistance	Image 0.70 Minimum	40°C, 90% RH, 15 Hours X-Rite (ODU)
	Background 0.20 Maximum	
Heat Resistance	Image 0.70 Minimum	90°C, Dry, 1 Hour X-Rite (ODU)
	Background 0.20 Maximum	
Light Lesistance	Image 0.70 Minimum	Fluorescent Lamp 5klx, 100 Hours X-Rite (ODU)
	Background 0.20 Maximum	

ADHESIVE PROPERTIES


ITEM	UNIT	SPECIFICATION	TEST METHOD
Shear Resistance	mm	2.00 Maximum	1kg, 30min, 25mm×25mm, 22°C 55%
Release Value	mN/40mm	300 Maximum	300mm/min, 22°C 55%
Peel Adhesion	N/25mm	1.00 Minimum	SUS, 300mm/min, 22°C 55%

SENSITIVITY RESULTS

Dynamic Sensitivity

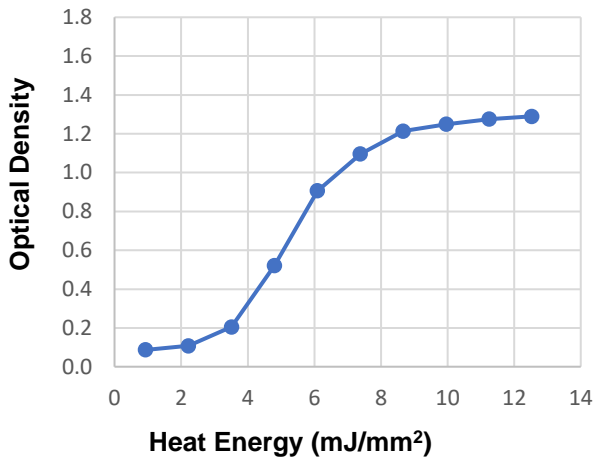

Static Sensitivity

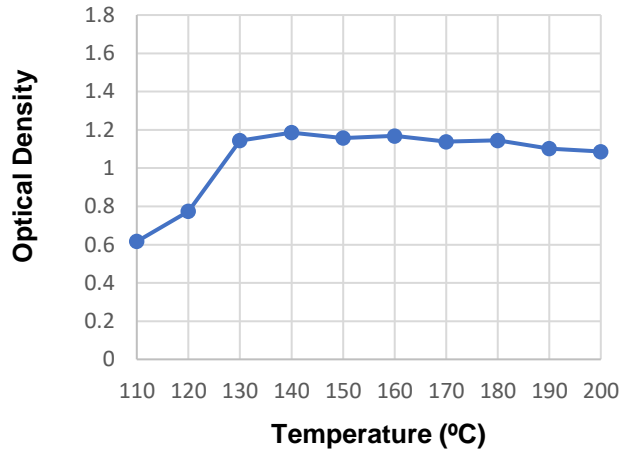

Sensitivity curves are for reference only.
 Storage Conditions: Below 95°F (35° C) and less than 85% R.H. in a warehouse, avoiding direct sunlight.
 Tests performed on Markpoint MP104.

130PLL-RRE – ADHESIVE PROPERTY

GRADE	UNIT	Hotmelt Removable Adhesive
Application Temperature	°F	41 to 95
	°C	5 to 35

CERTIFICATES / REGULATIONS / DIRECTIVES

- BPA Free
- ISO9001
- ISO14001
- Indirect Food Contact

RICOH ELECTRONICS, INC. DISCLAIMS ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE IN CONNECTION WITH THE CUSTOMER'S PURCHASE OF OUR PRODUCTS. IT IS CUSTOMER'S SOLE AND EXCLUSIVE RESPONSIBILITY TO TEST AND ENSURE SUITABILITY OF OUR PRODUCTS FOR ITS CUSTOMERS' OR END-USER'S APPLICATION.

CONTACT INFORMATION

Copyright 2024 Ricoh Electronics, Inc. 1125 Hurricane Shoals Rd. Lawrenceville, GA 30043 All Rights Reserved	Company Info ISO14001 / ISO9001 Certified	Customer Service Department Toll-Free 1-800-843-7058 Toll-Free Fax 1-888-873-7059 Worldwide Fax +1-714-259-4349 Email: orders@rei.ricoh.com
--	---	--