

CDT-1 (PET)

Clear Direct Thermal Film

ARFA

SPECIFICATION SHEET

This product specification sheet provides the detail to aid you in identifying the most appropriate product type to meet your company's specific requirements.

Please direct questions to: Ricoh Customer Service 1-800-843-7058

DESCRIPTION

Ricoh's CDT-1 Clear direct thermal label stock is ideal for high-speed. A Clear Direct Thermal Label product enhances visibility of package contents.

KEY FEATURES

Completely Phenol Free Clear Direct Thermal Product; High image resolution & barcode reliability; Strong water resistance & sensitivity



— A P P L I C A T I O N



Food Labeling

PROPERTIES

SUBSTRATE	ITEM	UNIT	SPECIFICATION	TEST METHOD
Caliper		mil	2.1± 0.24	JIS K-7130
Caliper		μm	54± 6	JIS K-7130
Haze		%	27 or less	JIS K-7136

IMAGE PROPERTIES

	ITEM	UNIT	SPECIFICATION	TEST METHOD
Color of Image		-	Black	Visual Measurement
Image Density		-	1.50 Minimum	-

PRESERVATION


ITEM	SPECIFICATION		TEST METHOD	
Plasticizer Resistance	Image	1.20 Minimum	23°C, Dry, 15 Hours	
Plasticizer Resistance	Background	0.20 Maximum	25 C, Dry, 15 Hours	
Oil Resistance	Image	1.20 Minimum	23°C, Dry, 24 Hours	
Oli Resistance	Background	0.20 Maximum		
	Image	1.20 Minimum		
Water Resistance	Background	0.20 Maximum	23°C, 15 Hours	
Temp/Humidity	Image	1.20 Minimum	40°C, 90% RH, 24 Hours	
Resistance	Background	0.20 Maximum	40 G, 50% KH, 24 HOUIS	
Heat Resistance	Image	1.20 Minimum	00°C Day 1 Hour	
neat Nesistance	Background	0.20 Maximum	90°C, Dry, 1 Hour	
Light Resistance	Image	1.20 Minimum	Fluorescent Lamp 5klx, 100 Hours	
Light Resistance	Background	0.20 Maximum	Fluorescent Lamp Skix, 100 Hour	
Microwave	Image	1.20 Minimum	1600W, 60 seconds	
Resistance	Background	0.20 Maximum		



CDT-1 (PET)

Clear Direct Thermal Label

SENSITIVITY RESULTS

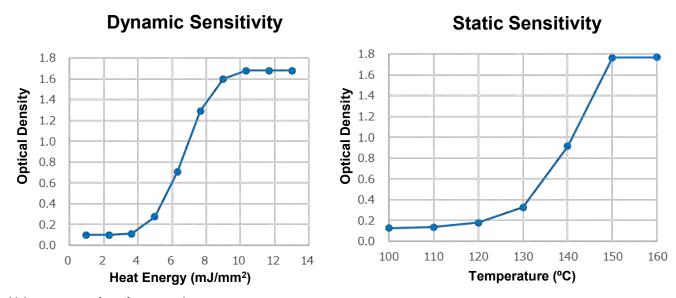

Sensitivity curves are for reference only. Storage Conditions: Below 95°F (35°C);

Storage Conditions: Below 95°F (35° C) and less than 85% R.H. in a warehouse, avoiding direct sunlight.

Tests performed on Markpoint MP104.

CDT-1 PET - ADHESIVE PROPERTY

GRADE	UNIT	G12	
Application	٥F	-40 to 122	
Temperature	°C	-40 to 50	
Service	°F	-65 to 131	
Temperature	°C	-54 to 55	

CERTIFICATES / REGULATIONS / DIRECTIVES

Completely Phenol Free

ISO9001

ISO14001

Indirect Food Contact

No Added PFAS

RICOH ELECTRONICS, INC. DISCLAIMS ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE IN CONNECTION WITH THE CUSTOMER'S PURCHASE OF OUR PRODUCTS. IT IS CUSTOMER'S SOLE AND EXCLUSIVE RESPONSIBILITY TO TEST AND ENSURE SUITABILITY OF OUR PRODUCTS FOR ITS CUSTOMERS' OR END-USER'S APPLICATION.

CONTACT INFORMATION

Copyright 2024 Ricoh Electronics, Inc. 1125 Hurricane Shoals Rd.

Lawrenceville, GA 30043 All Rights Reserved Company Info ISO14001 / ISO9001 Certified Customer Service Department

Toll-Free 1-800-843-7058

Toll-Free Fax 1-888-873-7059

Worldwide Fax +1-714-259-4349

Email: orders@rei.ricoh.com