

140TLE BF DIRECT THERMAL

Specifications may change without notice. Last Update: June 2025 PS-2473 (Rev.2)



140TLE BF is a BPS-free alternative to the original 140TLE formulation. It is a high-sensitivity direct thermal paper designed for tag and ticket applications. With a 5.0 mil caliper, it provides exceptional image resolution and barcode reliability. Its smooth surface extends thermal printhead longevity, making it ideal for entertainment tickets, parking passes, automated tickets, and shelf tags.

APPLICATION AREAS

- Entertainment
- Parking Ticket
- Automated Tickets
- Shelf Tags

FACESTOCK PROPERTIES

Basis Weight

| Basis weight | |
|--------------------------------|----------------|
| lbs (24 x 36 x 500 sheets) | 71.3 ± 7.1 |
| lbs (17 x 22 x 500 sheets) | 30.9 ± 3.1 |
| g/sq m | 116 ± 12 |
| Caliper | |
| mil | 5 ± 0.5 |
| μm | 126 ± 12 |
| Image Density (ODU Minimum) | 1.20 |
| Tear Strength (gf Minimum) | |
| MD | 50 |
| CD | 50 |
| Stiffness (g-cm Minimum) | |
| MD | 6.0 |
| CD | 5.0 |
| Initial Activation Temperature | |
| (°F / °C) | |
| O.D. = 0.2 | 181°F / 83°C |
| | |

Effective Activation Temperature

(°F / °C) O.D. = 0.8



CERTIFICATIONS

- ISO9001
- ISO14001

REGULATORY



BPS Free



BPA Free



No Added PFAS

PRESERVATION PROPERTIES

Oil Resistance

| Image | 1.00 Minimum |
|-------------|--------------------|
| Background | 0.15 Maximum |
| Test Method | 40°C, Dry, 15 Hrs, |

X-Rite (ODU)

X-Rite (ODU)

Moisture Resistance

| Image | 1.00 Minimum |
|-------------|-----------------------|
| Background | 0.15 Maximum |
| Test Method | 40°C, 90% RH, 24 Hrs, |

Heat Resistance

| Image | 0.80 Minimum |
|-------------|--------------------|
| Background | 0.20 Maximum |
| Test Method | 80°C, Dry, 24 Hrs, |
| | X-Rite (ODU) |

Light Resistance

208°F / 98°C


| Image | 1.15 Minimum |
|-------------|-------------------|
| Background | 0.15 Maximum |
| Test Method | 5000 lx, 100 Hrs, |
| | Y-Pita (ODLI) |




140TLE BF DIRECT THERMAL SENSITIVITY RESULTS

DYNAMIC SENSITIVITY

STATIC SENSITIVITY

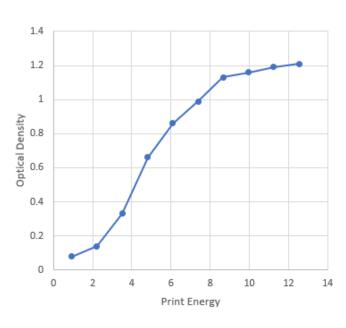

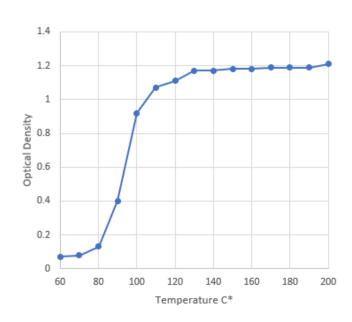

Sensitivity curves for reference only. Storage Conditions: Below 95°F (35°C) and less than 85% R.H. in a warehouse, avoiding direct sunlight. Dynamic sensitivity tests performed on Markpoint MP104.

CONTACT US

1125 Hurricane Shoals Road, Lawrenceville, GA 30043

www.REI.Ricoh.com

Email: Orders@rei.ricoh.com

Customer Service:

(800) 843-7059

Toll-Free Fax: (888) 873-7059