



### SPECIFICATION SHEET

This product specification sheet provides the detail to aid you in identifying the most appropriate product type to meet your company's specific requirements. Please direct questions to: **Ricoh Customer Service 1-800-843-7058**

#### DESCRIPTION

N140LA's direct thermal top coated label stock is durable, has medium sensitivity, strong resistance to plasticizers, and prints at high speeds.

#### KEY FEATURES

Standard top-coated thermal paper; Medium-high image resolution; Medium sensitivity; Strong image preservation against most environments.

### — APPLICATION AREAS —



Weigh Scale Labels



Shipping Labels



Meat Processing



Distribution/Inventory



Product ID

### FACESTOCK / PRESERVATION PROPERTIES

#### FACESTOCK PROPERTIES

ITEM		UNIT	SPECIFICATION	TEST METHOD
Basis Weight		lbs (24x36x500 sheets)	43.6 ± 4.3	TAPPI T-410
		g/m <sup>2</sup>	71 ± 7	
Caliper		mil	3.0 ± 0.3	TAPPI T-411
		µm	76 ± 7	
Image Color			Black	Visual Check
Image Density	(ODU)	Minimum	1.25	X-Rite Densitometer
Tear Strength	MD	gf Minimum	30	TAPPI T-414
	CD	gf Minimum	35	
Tensile Strength	MD	kgf/15 mm Minimum	5	TAPPI T-494
	CD	kgf/15 mm Minimum	2.5	
Stiffness	MD	g-cm Minimum	3.0	TAPPI T-489
	CD	g-cm Minimum	2.5	
Initial Activation Temperature	(O.D. = 0.2)	°F / °C	Ø    0	
Effective Activation Temperature	(O.D. = 0.8)	°F / °C	2ñ 1b	


#### PRESERVATION PROPERTIES

ITEM	SPECIFICATION		TEST METHOD
Oil Resistance	Image	1.10 Minimum	40° C, Dry, 15 Hours X-Rite (ODU)
	Background	0.30 Maximum	
Moisture Resistance	Image	1.10 Minimum	40° C, 90% RH, 24 Hours X-Rite (ODU)
	Background	0.30 Maximum	
Heat Resistance	Image	1.10 Minimum	80° C, Dry, 1 Hour X-Rite (ODU)
	Background	0.30 Maximum	
Light Resistance	Image	1.10 Minimum	5000 lx, 100 Hours X-Rite (ODU)
	Background	0.30 Maximum	




### SENSITIVITY RESULTS

#### Dynamic Sensitivity

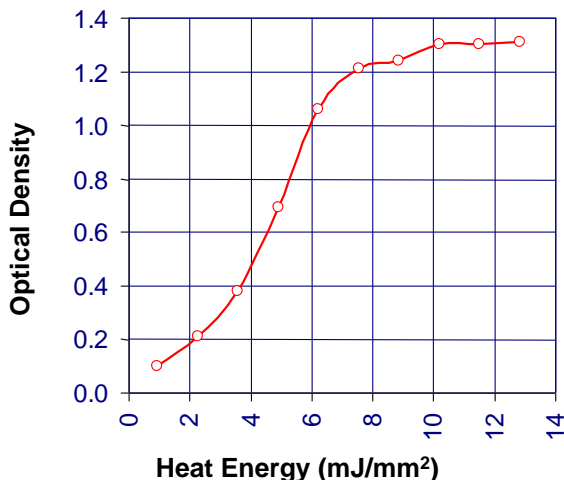

#### Static Sensitivity

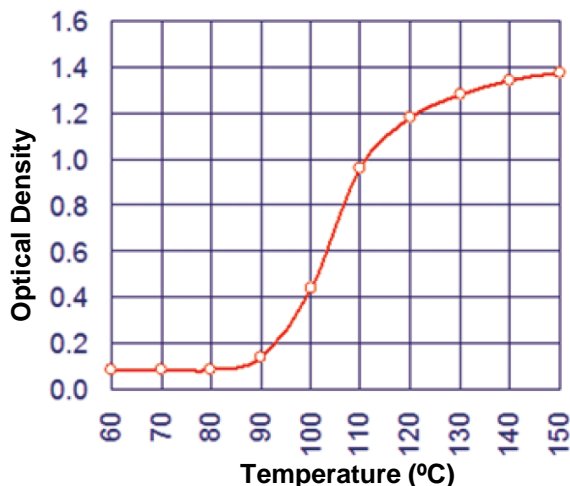

Sensitivity curves are for reference only.

Storage Conditions: Below 95°F (35° C) and less than 85% R.H. in a warehouse, avoiding direct sunlight.

Tests performed on Markpoint MP104.

### N140LA – LAMINATED PRODUCT

GRADE	UNIT	G25	G8	G22
Application	°F	-40 to 122	10 to 120	28 to 120
Temperature	°C	-40 to 50	-12 to 49	-2 to 50
Service	°F	-65 to 131	-20 to 120	-40 to 122
Temperature	°C	-54 to 55	-29 to 49	-40 to 50
Basis Weight	lbs	98 ± 12	95 ± 12	101 ± 12
(24 x 36 x 500)	g/m <sup>2</sup>	160 ± 19	154 ± 19	164 ± 19
Caliper	µm	152 ± 18	152 ± 18	157 ± 18
	mil	6.0 ± 0.7	6.0 ± 0.7	6.2 ± 0.7

Liner: 40 lbs

Caliper: 2.5 mils ± 10% (64 ± 8 µm)

Opacity: 65% Maximum (Photovolt)

**Adhesive Attributes:**

G25 – Wide Temperature and Permanent

G8 – Tight Removable

G22 – Hot Melt for High Moisture Environments

### CERTIFICATES / REGULATIONS / DIRECTIVES

BPA Free

No Added PFAS

ISO9001

ISO14001

Indirect Food Contact

RICOH ELECTRONICS, INC. DISCLAIMS ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE IN CONNECTION WITH THE CUSTOMER'S PURCHASE OF OUR PRODUCTS. IT IS CUSTOMER'S SOLE AND EXCLUSIVE RESPONSIBILITY TO TEST AND ENSURE SUITABILITY OF OUR PRODUCTS FOR ITS CUSTOMERS' OR END-USER'S APPLICATION.

### CONTACT INFORMATION

Copyright 2024 Ricoh Electronics, Inc.

1125 Hurricane Shoals Rd.

Lawrenceville, GA 30043

All Rights Reserved

**Company Info**

ISO14001 / ISO9001 Certified

**Customer Service Department**

Toll-Free 1-800-843-7058

Toll-Free Fax 1-888-843-7059

Worldwide Fax +1-770-613-6478

Email: orders@rei.ricoh.com