



SPECIFICATION SHEET

This product specification sheet provides the detail to aid you in identifying the most appropriate product type to meet your company's specific requirements. Please direct questions to: **Ricoh Customer Service 1-800-843-7058**

DESCRIPTION


Ricoh's 150LB PF is a medium sensitivity direct thermal label stock designed for tight mandrel applications such as test tubes and vials.

Key Features

Completely Phenol Free, Anti Flagging Design, Glove Friendly, Re-positionable, Excellent Image Resolution



— APPLICATION AREAS —



Blood Vials



Test Tubes

FACESTOCK / PRESERVATION PROPERTIES

FACESTOCK PROPERTIES


ITEM		UNIT	SPECIFICATION	TEST METHOD
Basis Weight		lbs (24x36x500 sheets)	44.9 ± 4.5	TAPPI T-410
		g/m ²	73 ± 7	
Caliper		mil	3.1 ± 0.3	TAPPI T-411
		µm	78.5 ± 8	
Image Color			Black	Visual Check
Image Density	(ODU)	Minimum	1.25	X-Rite Densitometer
Tear Strength	MD	gf Minimum	30.0	TAPPI T-414
	CD	gf Minimum	35.0	
Tensile Strength	MD	kgf/15 mm Minimum	5.4	TAPPI T-494
	CD	kgf/15 mm Minimum	2.7	
Stiffness	MD	g-cm Minimum	3.0	TAPPI T-489
	CD	g-cm Minimum	2.5	
Initial Activation Temperature	(O.D. = 0.2)	°F / °C	212 / 100	
Effective Activation Temperature	(O.D. = 0.8)	°F / °C	239 / 115	

PRESERVATION PROPERTIES


ITEM	SPECIFICATION		TEST METHOD
Oil Resistance	Image	1.10 Minimum	40° C, Dry, 15 Hours X-Rite (ODU)
	Background	0.15 Maximum	
Moisture Resistance	Image	1.10 Minimum	40° C, 90% RH, 24 Hours X-Rite (ODU)
	Background	0.12 Maximum	
Heat Resistance	Image	1.10 Minimum	80° C, Dry, 1 Hour X-Rite (ODU)
	Background	0.30 Maximum	
Light Resistance	Image	1.10 Minimum	5,000 lx, 100 Hours X-Rite (ODU)
	Background	0.15 Maximum	

SENSITIVITY RESULTS

Dynamic Sensitivity

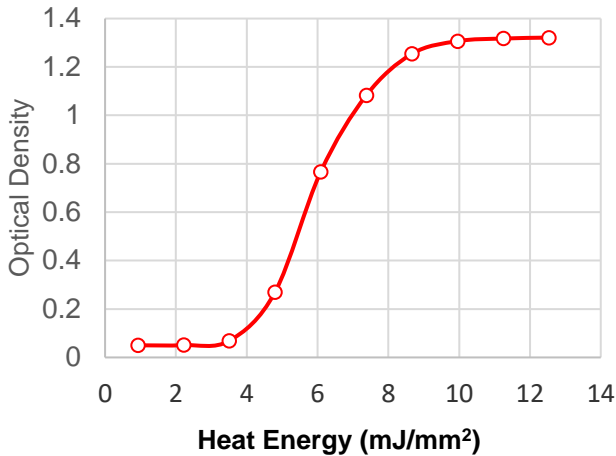

Static Sensitivity

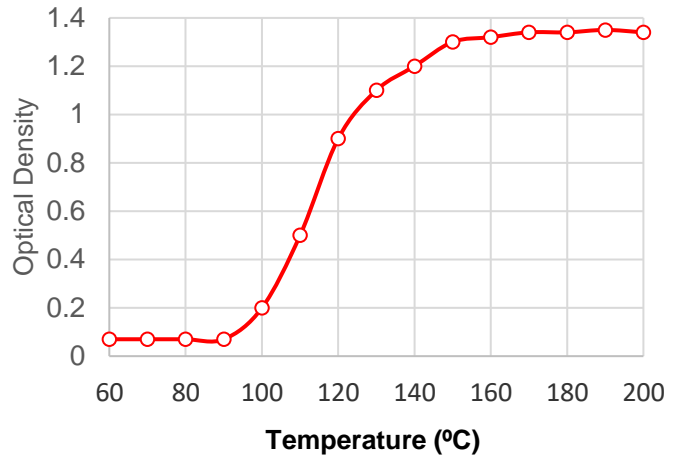

Sensitivity curves are for reference only.

Storage Conditions: Below 95°F (35° C) and less than 85% R.H. in a warehouse, avoiding direct sunlight.

Tests performed on Markpoint MP104.

150LB PF – LAMINATED PRODUCT

GRADE	UNIT	TM
Application	°F	35 to 122
Temperature	°C	2 to 50
Service	°F	-18 to 135
Temperature	°C	-28 to 57
Basis Weight	lbs	93 ± 12
(24 x 36 x 500)	g/m ²	151 ± 19
Caliper	µm	150 ± 18
	mil	5.9 ± 0.7

Liner: 40 lbs

Caliper: 2.5 mils ± 10% (64 ± 8 µm)

Opacity: 65% Maximum (Photovolt)

Adhesive Attributes:

TM – Tight Mandrel

CERTIFICATES / REGULATIONS / DIRECTIVES

Completely Phenol Free

ISO9001

ISO14001

Indirect Food Contact

No Added PFAS

RICOH ELECTRONICS, INC. DISCLAIMS ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE IN CONNECTION WITH THE CUSTOMER'S PURCHASE OF OUR PRODUCTS. IT IS CUSTOMER'S SOLE AND EXCLUSIVE RESPONSIBILITY TO TEST AND ENSURE SUITABILITY OF OUR PRODUCTS FOR ITS CUSTOMERS' OR END-USER'S APPLICATION.

CONTACT INFORMATION

Copyright 2024 Ricoh Electronics, Inc.

1125 Hurricane Shoals Rd.

Lawrenceville, GA 30043

All Rights Reserved

Company Info

ISO14001 / ISO9001 Certified

Customer Service Department

Toll-Free 1-800-843-7058

Toll-Free Fax 1-888-873-7059

Worldwide Fax +1-770-613-6478

Email: orders@rei.ricoh.com